




# STONE DASH PLASTER DESIGN CATALOGUE

**ARTi SAN**


WE DO IT BETTER




# ARTISAN STONE DASH PLASTER

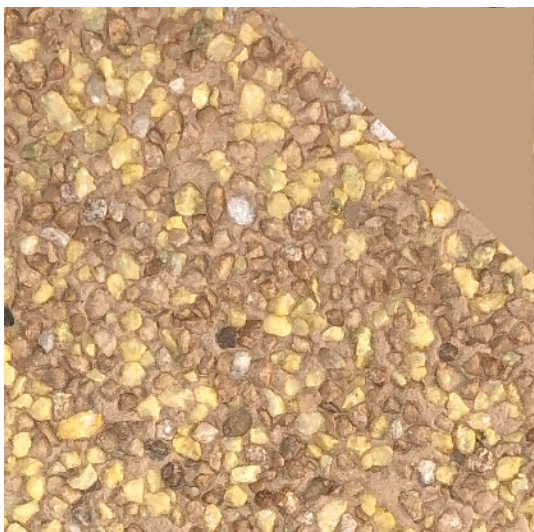


**SDP 01**

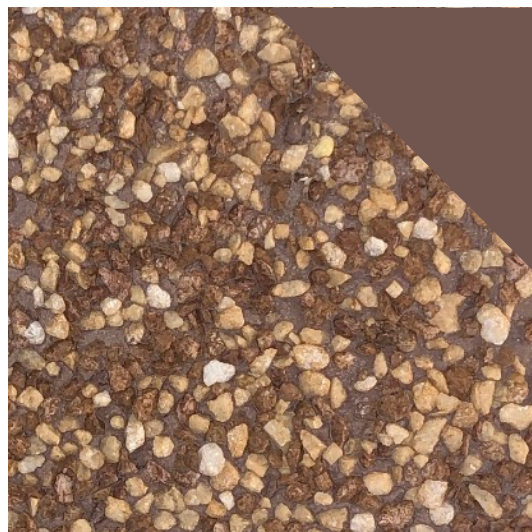

**SDP 02**

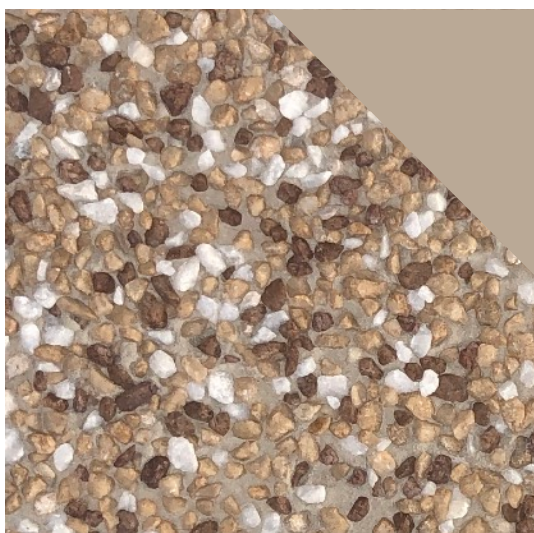

**SDP 03**

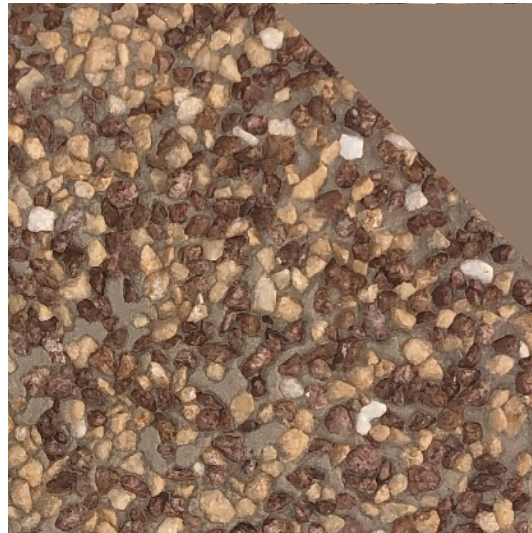

**SDP 04**



**SDP 05**




**SDP 06**


DURABLE | MODERN | BESPOKE | ELEGANT | SUPREME QUALITY




# ARTISAN STONE DASH PLASTER

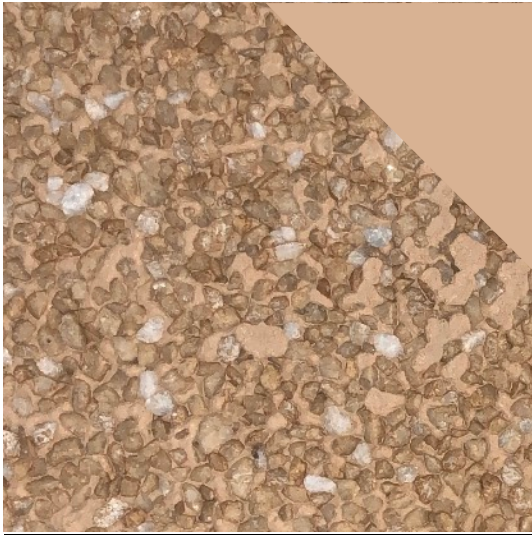


**SDP 07**

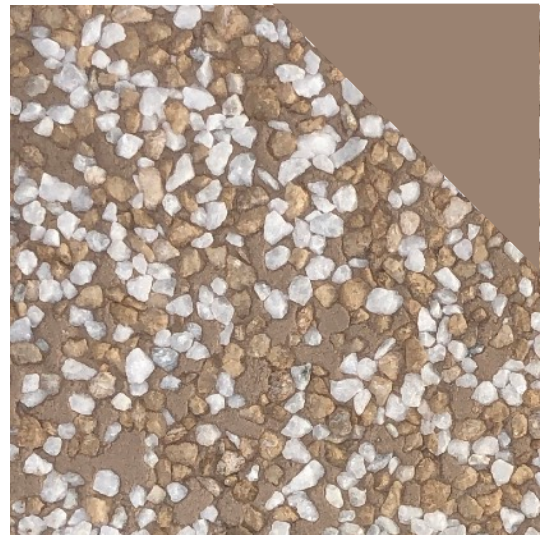

**SDP 08**

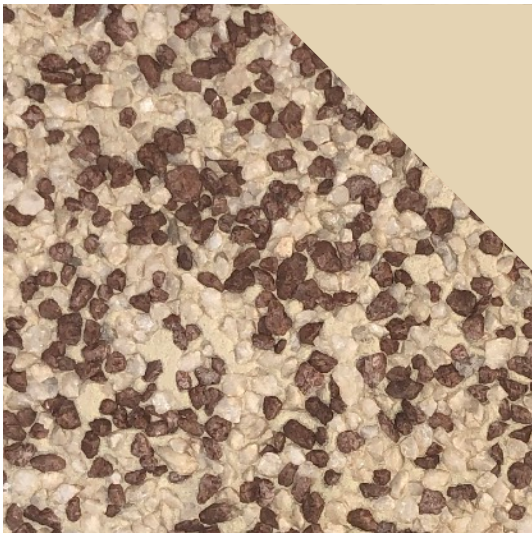


**SDP 09**

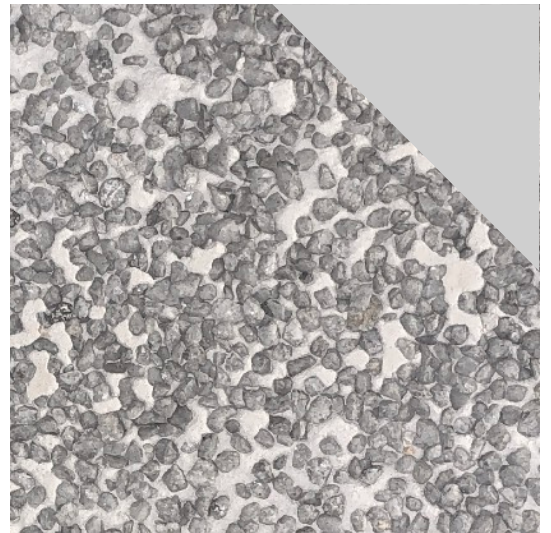

**SDP 10**



**SDP 11**

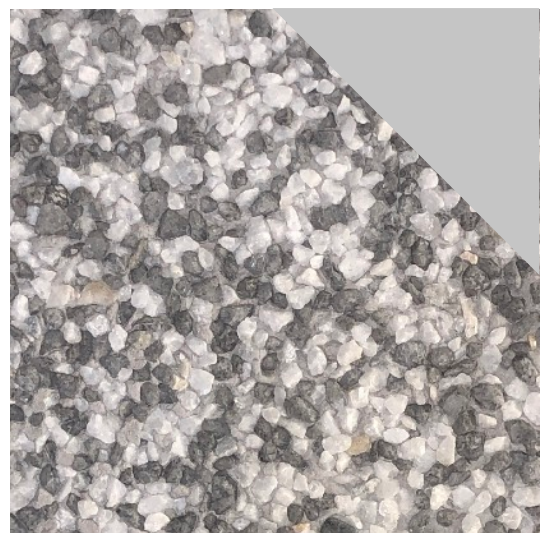


**SDP 12**


DURABLE | MODERN | BESPOKE | ELEGANT | SUPREME QUALITY




# ARTISAN STONE DASH PLASTER

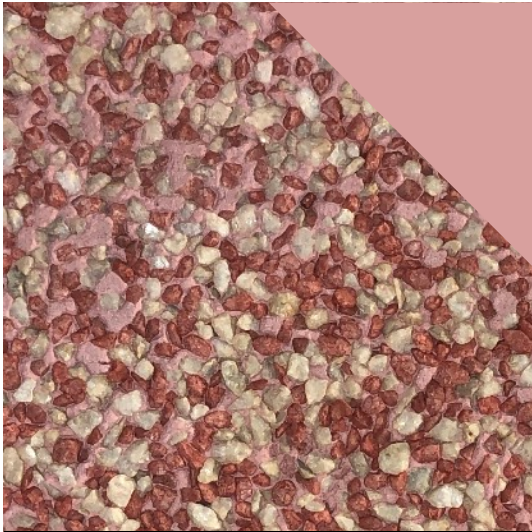

**SDP 13**

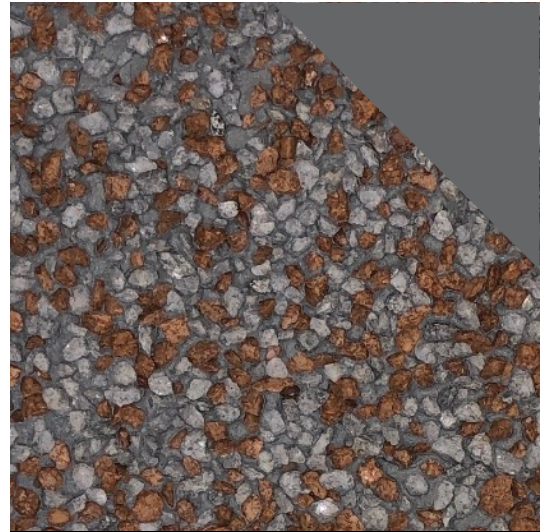


**SDP 14**

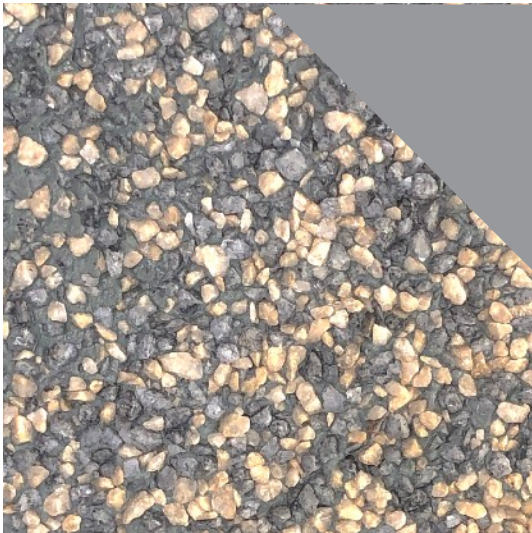

**SDP 15**



**SDP 16**

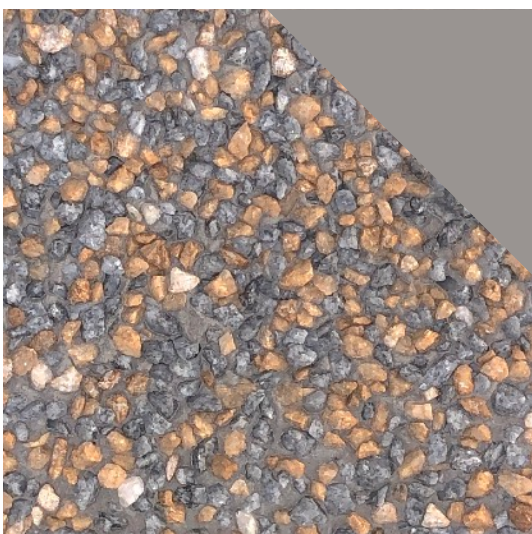

**SDP 17**



**SDP 18**

DURABLE | MODERN | BESPOKE | ELEGANT | SUPREME QUALITY

## Application Method of Artisan Stone Dash Plaster



### Surface Preparation:

Clean the surface thoroughly and make sure the surface is free from dust, loose particles, oil, water and other foreign material.

### Water Ratio:

Pour 5 to 5.5Ltr of clean water in mixing bucket used for mixing one bag of 25kg. Calculate the water carefully as excess or less water will effect the performance of the product.



### Mixing:

Start adding powder supplied in 25kg bags in the mixing bucket while mixing with electric mortar mixer at speed of 300-400 RPM. Mix for good 3-4 minutes until the material is mixed homogeneously and observe the colour dispersion is uniform. Once the material is mixed wait 3 minutes and mix for 2 minutes before starting to apply the prepared binder on prepared surface.

*Note: Mixed material should be applied immediately which will give enough time to spread the stone and finish properly. Make sure all items, tools etc are prepared before mixing any material. Also do not add water to dilute the material once it is starting to harden and set.*



### Application:

Any defects in the surface can be filled using the mixed binder. It is highly recommended to use Artisan B prime primer on the surface for best results and performance. Apply the mixed binder on the prepared surface with the recommended application thickness of 6-8mm. Apply material on enough area that can be stone dashed in the recommended open time for binder (40-45minutes @ 25°C).

### Coverage:

Average 1.7-2 M2 coverage with one set of Binder+Dash Stone. (25kg+25kg). With recommended application thickness.



### Stone Dashing:

Once the binder is applied on the wall, Start dashing the stone using suitable tool and cover all area to get the best effect and finish.

If the finish of stone dash plaster is too sharp or rough. Tap on the Stone dashed wall with clean and dry trowel to press the stones in the binder. This will help achieve blunt and smoother finish.

*Note: Place box or sheet below the application area to collect excess stones which can be reused again.*



WE DO IT BETTER



# ARTISAN STONE DASH PLASTER

MODERN

BESPOKE

ELEGANT

DURABLE



- **BINDING PLASTER: 25 KG BAG**
- **STONE MIX: 25 KG BAG**

Marketed & Distributed By:  
Imdad Building Material Trading LLC

Ph: +971 6 766 2050  
Mob: +971 50 699 6192  
Email: [imdadbm2012@gmail.com](mailto:imdadbm2012@gmail.com)



WE DO IT BETTER